

# ActuateOne™

One Design  
One Server  
One User Experience

## Using Actuate BIRT Java Components

Information in this document is subject to change without notice. Examples provided are fictitious. No part of this document may be reproduced or transmitted in any form, or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of Actuate Corporation.

© 1995 - 2011 by Actuate Corporation. All rights reserved. Printed in the United States of America.

Contains information proprietary to:  
Actuate Corporation, 2207 Bridgepointe Parkway, San Mateo, CA 94404

[www.actuate.com](http://www.actuate.com)  
[www.birt-exchange.com](http://www.birt-exchange.com)

The software described in this manual is provided by Actuate Corporation under an Actuate License agreement. The software may be used only in accordance with the terms of the agreement. Actuate software products are protected by U.S. and International patents and patents pending. For a current list of patents, please see <http://www.actuate.com/patents>.

Actuate Corporation trademarks and registered trademarks include:  
Actuate, ActuateOne, the Actuate logo, Archived Data Analytics, BIRT, Collaborative Reporting Architecture, e.Analysis, e.Report, e.Reporting, e.Spreadsheet, Encyclopedia, Interactive Viewing, OnPerformance, Performancesoft, Performancesoft Track, Performancesoft Views, Report Encyclopedia, Reportlet, The people behind BIRT, X2BIRT, and XML reports.

Actuate products may contain third-party products or technologies. Third-party trademarks or registered trademarks of their respective owners, companies, or organizations include:

Adobe Systems Incorporated: Flash Player. Apache Software Foundation ([www.apache.org](http://www.apache.org)): Axis, Axis2, Batik, Batik SVG library, Commons Command Line Interface (CLI), Commons Codec, Derby, Shindig, Struts, Tomcat, Xerces, Xerces2 Java Parser, and Xerces-C++ XML Parser. Bits Per Second, Ltd. and Graphics Server Technologies, L.P.: Graphics Server. Bruno Lowagie and Paulo Soares: iText, licensed under the Mozilla Public License (MPL). Castor ([www.castor.org](http://www.castor.org)), ExoLab Project ([www.exolab.org](http://www.exolab.org)), and Intalio, Inc. ([www.intalio.org](http://www.intalio.org)): Castor. Codejock Software: Xtreme Toolkit Pro. DataDirect Technologies Corporation: DataDirect JDBC, DataDirect ODBC. Eclipse Foundation, Inc. ([www.eclipse.org](http://www.eclipse.org)): Babel, Data Tools Platform (DTP) ODA, Eclipse SDK, Graphics Editor Framework (GEF), Eclipse Modeling Framework (EMF), and Eclipse Web Tools Platform (WTP), licensed under the Eclipse Public License (EPL). Jason Hsueh and Kenton Varda ([code.google.com](http://code.google.com)): Protocole Buffer. ImageMagick Studio LLC.: ImageMagick. InfoSoft Global (P) Ltd.: FusionCharts, FusionMaps, FusionWidgets, PowerCharts. Mark Adler and Jean-loup Gailly ([www.zlib.net](http://www.zlib.net)): zlib. Matt Ingenthron, Eric D. Lambert, and Dustin Sallings ([code.google.com](http://code.google.com)): Spymemcached, licensed under the MIT OSI License. International Components for Unicode (ICU): ICU library. KL Group, Inc.: XRT Graph, licensed under XRT for Motif Binary License Agreement. LEAD Technologies, Inc.: LEADTOOLS. Microsoft Corporation (Microsoft Developer Network): CompoundDocument Library. Mozilla: Mozilla XML Parser, licensed under the Mozilla Public License (MPL). MySQL Americas, Inc.: MySQL Connector. Netscape Communications Corporation, Inc.: Rhino, licensed under the Netscape Public License (NPL). Oracle Corporation: Berkeley DB. PostgreSQL Global Development Group: pgAdmin, PostgreSQL, PostgreSQL JDBC driver. Rogue Wave Software, Inc.: Rogue Wave Library SourcePro Core, tools.h++. Sam Stephenson ([prototype.conio.net](http://prototype.conio.net)): prototype.js, licensed under the MIT license. Sencha Inc.: Ext JS. Sun Microsystems, Inc.: JAXB, JDK, Jstl. ThimbleWare, Inc.: JMemcached, licensed under the Apache Public License (APL). World Wide Web Consortium (W3C)(MIT, ERCIM, Keio): Flute, JTIty, Simple API for CSS. XFree86 Project, Inc.: ([www.xfree86.org](http://www.xfree86.org)): xvfb. Yuri Kanivets ([code.google.com](http://code.google.com)): Android Wheel gadget, licensed under the Apache Public License (APL). ZXing authors ([code.google.com](http://code.google.com)): ZXing, licensed under the Apache Public License (APL).

All other brand or product names are trademarks or registered trademarks of their respective owners, companies, or organizations.

Document No. 110812-2-771311 August 5, 2011

# Contents

<b>About <i>Using Actuate BIRT Java Components</i> .....</b>	<b>iii</b>
<b>Chapter 1</b>	
<b>Introducing Actuate Java Components .....</b>	<b>1</b>
Using Actuate Java Components .....	2
About Actuate Deployment Kits .....	3
About Actuate documentation .....	4
Obtaining documentation .....	6
<b>Chapter 2</b>	
<b>Managing files and folders .....</b>	<b>7</b>
Getting started with Actuate Java Components .....	8
Navigating BIRT Deployment Kit .....	9
About the banner menu .....	10
About the inner banner menu .....	10
About the navigation pane .....	10
About the file and folder pane .....	10
Changing the file view .....	10
Browsing the documents page .....	12
Getting detailed information about files and folders .....	13
About functionality levels .....	14
Working with files .....	14
Deleting a file .....	15
Using filters .....	15
Enabling the filter option .....	16
Filtering items on a documents page .....	16
Removing filter selections .....	17
Setting your locale .....	17
<b>Chapter 3</b>	
<b>Running jobs .....</b>	<b>19</b>
Running a job .....	20
Running a BIRT report job .....	20
Running a run and view spreadsheet report job .....	20
Using parameters .....	21
Understanding parameter types .....	22
Using multiple-value parameters .....	23
Making expressions for ad hoc parameters .....	23
Using a dynamic filter operator .....	24

Using Query by Example operators .....	27
Using data types with Query by Example .....	30
Using a special character to match one or more characters in a QBE string .....	31
<b>Index .....</b>	<b>35</b>

# A b o u t U s i n g A c t u a t e B I R T J a v a C o m p o n e n t s

---

*Using Actuate BIRT Java Components* includes the following chapters:

- *About Using Actuate BIRT Java Components.* This chapter provides an overview of this guide.
- *Chapter 1. Introducing Actuate Java Components.* This chapter explains online reporting and how Actuate Deployment Kit works.
- *Chapter 2. Managing files and folders.* This chapter explains how to access Deployment Kit and manage files.
- *Chapter 3. Running jobs.* This chapter provides information on generating and viewing documents using Actuate Deployment Kit.



# 1

## Introducing Actuate Java Components

This chapter contains the following topics:

- Using Actuate Java Components
- About Actuate Deployment Kits

# Using Actuate Java Components

In a diverse and global business enterprise, businesses and organizations need a way to create, publish, and deploy content on a regular basis to a variety of users. These users require access to information distributed across various network environments, such as the internet, intranets, and extranets.

Actuate BIRT report and spreadsheet file types provide an efficient, searchable, and easily updated alternative to static web pages or traditional, paper-based reporting. Actuate Java Components include:

- Actuate BIRT Data Analyzer enables data cube analysis. Users create and edit cross tabs tables and charts, and save their analysis as Actuate cube view files.
- Actuate BIRT Interactive Viewer enables users to filter, format, and personalize BIRT report document files using a web browser.
- Actuate BIRT Studio enables users to create and edit BIRT report design files using a web browser.
- Actuate BIRT Viewer enables users to view and navigate BIRT report document files using a web browser.

Figure 1-1 shows the default Actuate Java Components landing page, which lists the Actuate Java Components, including the Deployment Kits.



**Figure 1-1** Actuate Java Components landing page



Each product on this list is a separately licensed Java Component. The landing page looks different if your company has customized the page. Users access BIRT report and spreadsheet files using URIs.

---

## About Actuate Deployment Kits

An Actuate Deployment Kit is an end-user product that you use to run, view, download and print reports. Deployment Kit connects to and stores the reports on the file system. It also integrates with other Java Components - the report viewers, BIRT Studio and BIRT Data Analyzer. Actuate Deployment Kits include:


- Actuate BIRT Deployment Kit, a file repository that enables users to browse, run, and interact with BIRT design and document files using a web browser.
- Actuate BIRT Spreadsheet Deployment Kit, a file repository that enables users to browse and run BIRT spreadsheet design files using a web browser.

A Deployment Kit is not an authoring tool for reports. Actuate report design tools, like BIRT Spreadsheet Designer, BIRT Designer Professional, or BIRT Studio create the reports. Typically, your Deployment Kit administrator publishes reports to the file system. Deployment Kits are therefore not dependant upon a particular report design tool, freeing report developers to create reports in their own fashion. Deployment Kits handle file management and security.

All you need is a web browser and a URL to access the Deployment Kit. The following web browsers are supported:


- Google Chrome 11.x
- Microsoft Internet Explorer 7.x, 8.x, and 9.x
- Mozilla Firefox 4.x and 5.x
- Safari 4

You manage, generate, and view Actuate reports remotely or locally using the files and folders page in a web browser. Locally, any of the Actuate report design tools can perform these tasks as well. When you are using Deployment Kit, the files and folders page appears as shown in Figure 1-2.

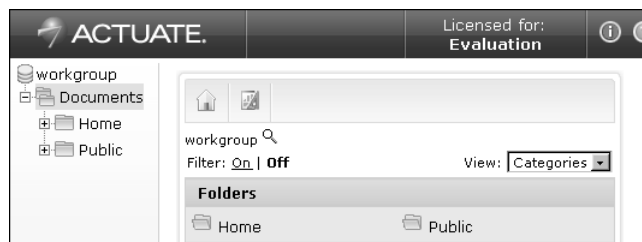

**Figure 1-2** Files and folders page

Figure 1-3 shows a high-level view of how client applications interact with Deployment Kit. The shaded areas indicate the tools with which you work.

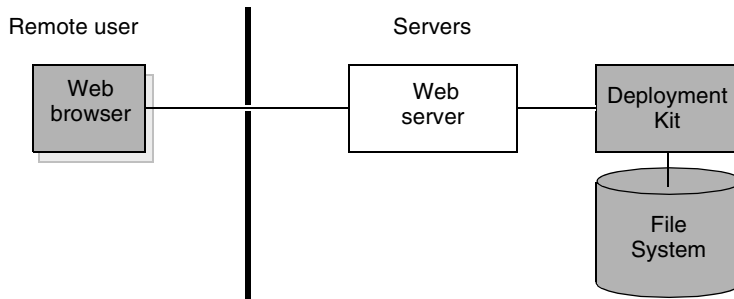

**Figure 1-3** Actuate Reporting architecture






## About Actuate documentation

The printed and online documentation includes the materials listed in Table 1-1.

**Table 1-1** Actuate documentation

For information about this topic	See the following resource
Using Actuate BIRT Java Components <ul style="list-style-type: none"> <li>■ Changing the user interface</li> <li>■ Running file jobs</li> <li>■ Using filters</li> <li>■ Using parameters</li> </ul>	<p><i>Using Actuate BIRT Java Components</i></p>
Using BIRT Data Analyzer <ul style="list-style-type: none"> <li>■ Organizing and formatting a cross tab</li> <li>■ Filtering cross tab data</li> <li>■ Working with data cubes</li> <li>■ Working with charts</li> </ul>	<p><i>Using BIRT Data Analyzer</i></p>
Using BIRT Studio - Java Component Edition <ul style="list-style-type: none"> <li>■ Using BIRT Studio</li> <li>■ Editing and formatting report content</li> <li>■ Organizing and filtering data</li> <li>■ Presenting data</li> </ul>	<p><i>Using BIRT Studio - Java Component Edition</i></p>

**Table 1-1** Actuate documentation

For information about this topic	See the following resource
<p>Actuate BIRT Java Components Developer Guide</p> <ul style="list-style-type: none"><li>■ Customizing Actuate Java Components</li><li>■ Creating custom web applications</li><li>■ Actuate Java Components reference</li></ul>	 <p><i>Actuate BIRT Java Components Developer Guide</i></p>
<p>Using Actuate JavaScript API</p> <ul style="list-style-type: none"><li>■ Creating custom web pages</li><li>■ Actuate JavaScript API classes</li><li>■ BIRT Data Analyzer API classes</li><li>■ Creating dynamic report content</li></ul>	 <p><i>Using Actuate JavaScript API</i></p>
<p>Working with Actuate BIRT Viewers</p> <ul style="list-style-type: none"><li>■ Using Actuate BIRT Viewers</li><li>■ Editing and formatting a report</li><li>■ Organizing and filtering data</li><li>■ Modifying charts and cross tabs</li></ul>	 <p><i>Working with Actuate BIRT Viewers</i></p>
<p>Actuate Glossary</p> <p>Definitions of Actuate product terminology</p>	 <p><i>Actuate Glossary</i></p>
<p>Adobe Acrobat Catalog</p> <p>A utility that can search all the documents in the Actuate manuals directory</p>	 <p><i>Adobe Acrobat Catalog</i></p>

You can obtain HTML and PDF files from the BIRT Exchange or Actuate Customer Support site. Additional documentation is also available from these sites. This document is the online help for Java Components. Each browser-based tool contains its own online help files.

## Obtaining documentation

Actuate provides technical documentation in PDF, HTML, and print formats. You can download PDF or view HTML versions of the documentation from [Birt-exchange.com](http://Birt-exchange.com). If you purchase the product, you can also download documentation using the File Transfer Protocol (FTP), as instructed in the e-mail from Actuate Distribution.

If you request a physical package, install the files using the Online Documentation and Localization Resource Files DVD, which ships as part of your Actuate software package. If you select the typical setup when you install from the DVD, the installation creates the Actuate11 \Manuals directory.

# Managing files and folders

This chapter contains the following topics:

- Getting started with Actuate Java Components
- Using filters
- Setting your locale

---

# Getting started with Actuate Java Components


To access reports using a Java Component, you open the Actuate Java Components web application using a hyperlink or a web address similar to the following URL:

`http://actuate1:8080/ActuateJavaComponents`

where

- `actuate1:8080` is the web server and TCP port that runs the deployed web service.
- `ActuateJavaComponents` is the context root to an Actuate web application. The context root is set by the web server administrator.

Figure 2-1 shows the default Actuate Java Components landing page. The landing page looks different if your company has customized the page.

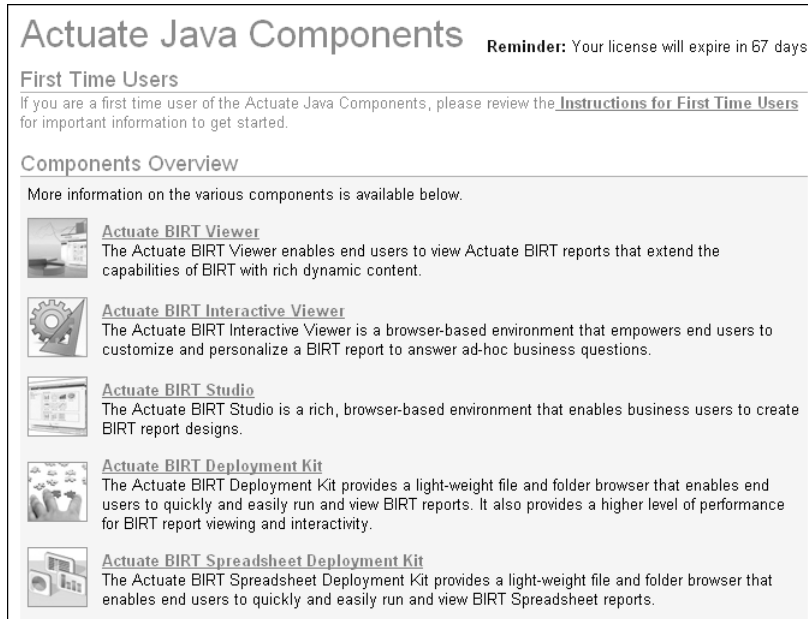

**Figure 2-1** Actuate Java Components landing page

Each product on this list is a separately licensed Java Component. How you access files depends upon which licenses you have:

- If you have purchased a Deployment Kit License, you can access reports using a Deployment Kit link.


- If you have not purchased a license for a Deployment Kit but purchased a license for BIRT Report Studio or BIRT Interactive Viewer, you access the reports using a URL for the Documents page. The Documents page has identical functionality to that of the Deployment Kit Documents page.
- If you have only purchased a license for BIRT Viewer, you do not have access to the Documents page and only view reports for which you have a direct URL.

This manual uses the BIRT Deployment Kit as an example. The Documents Page for each product has the same appearance and functionality. The pages for each Deployment Kit have the same appearance and functionality.

For more information about using Actuate Java Components from a web browser, see *Actuate BIRT Java Components Developer Guide*.


## Navigating BIRT Deployment Kit

To open the Deployment Kit landing page, choose a Deployment Kit link on the Actuate Java Components landing page. The Deployment Kit landing page appears, as shown in Figure 2-2.

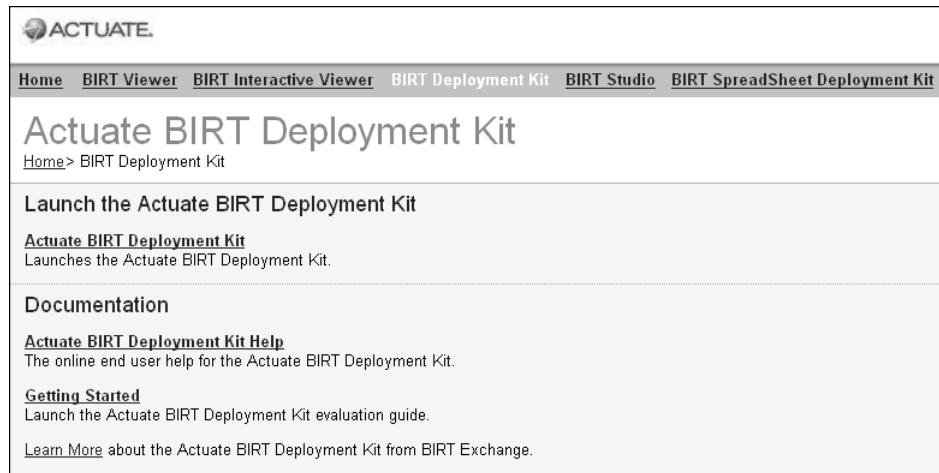

**Figure 2-2** Deployment Kit landing page

Choose the launch link to open the Deployment Kit Documents page. Figure 2-3 shows an example Documents page. The Documents page looks different if it has been customized by an administrator or developer.

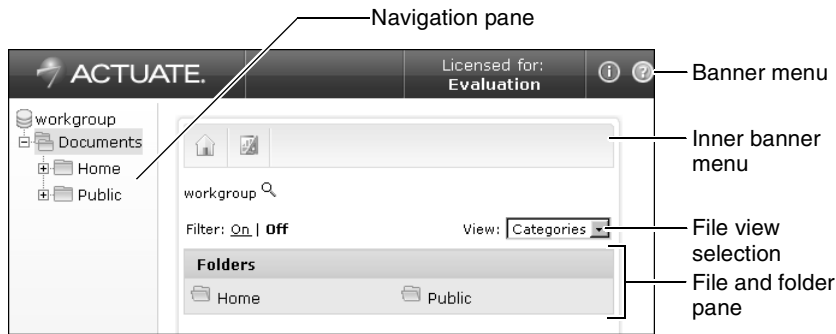

**Figure 2-3** Deployment Kit Documents page

## About the banner menu

The banner at the top of the page displays one or more of the following elements:

- Company logo. By default, the Actuate logo appears.
- A link to the About page, which contains license and version information about Deployment Kit.
- Help to access online help files.

## About the inner banner menu

This menu provides a link to the documents folder of the repositories and BIRT Studio.

## About the navigation pane

This pane displays links to document folders in the file repository. The selected skin manages the display of this pane. You can choose a Documents link to browse the folders and files to which you have access.

## About the file and folder pane

This pane displays links to the contents of the current folder. The selected file view manages the display of this pane. For example, the main display area of a Documents page shows the contents of a Home and Public folder. You also enable the filter option from the main display area.


## Changing the file view

Users select a file view to change the layout of files and folders in a deployment kit. The following views are available with a deployment kit:



- Categories


Files and folders are grouped into categories, as shown in Figure 2-4. Common file operations appear as icon images. All additional file operations are available by viewing file details.

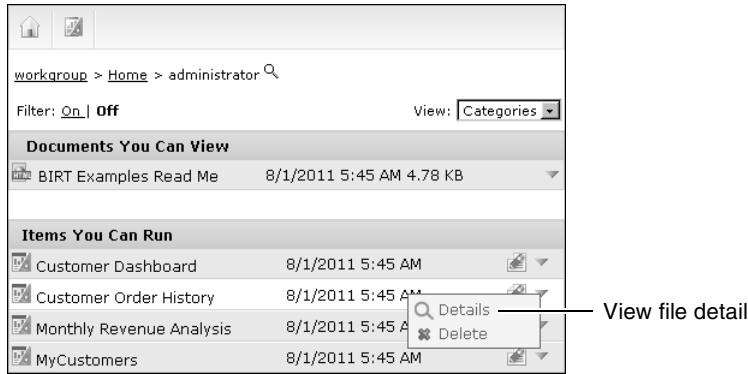

**Figure 2-4** Viewing files in Categories View

- Details


Files and folders are organized alphabetically in a table, as shown in Figure 2-5. File type and page count are visible. Common file operations appear as a menu when the mouse hovers over the file icon.

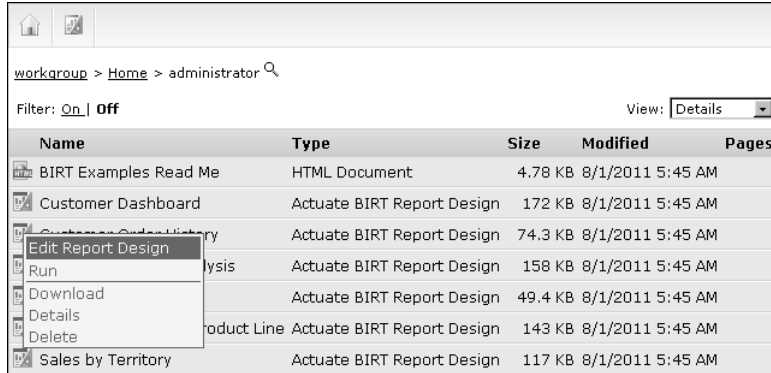

**Figure 2-5** Viewing files in Details View

- Icons


Files and folders are organized alphabetically and presented as large file icons in multiple columns, as shown in Figure 2-6. Common file operations appear as a menu when the mouse hovers over the file icon.

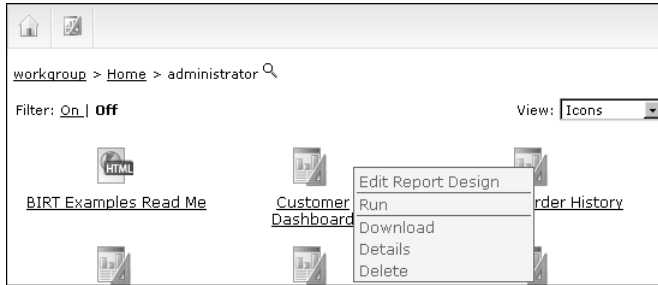

**Figure 2-6** Viewing files in Icons View

- List

Files and folders are organized alphabetically and presented as small file icons in multiple columns, as shown in Figure 2-7. Common file operations appear as a menu when the mouse hovers over the file icon.

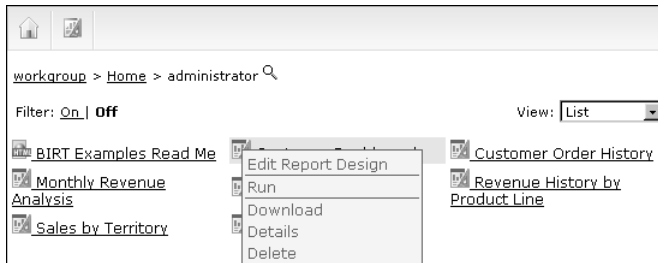

**Figure 2-7** Viewing files in List View

Each view arranges items differently. Most examples in this manual show and describe use the Categories view.

## Browsing the documents page


Choose Documents from the navigation pane to access links to folders and files. On a documents page, you can choose a folder link to access folder contents. A documents page displays the contents of the current folder. For example, choose Public to see the contents of the Public folder. You can access your home folder, if you have one, and folders within the public folder.

By default, a documents page organizes the contents of a folder by categories. Depending on the contents of the current folder, you see some, all, or none of the following categories:

- Folders, which shows the subfolders within the current folder.
- Documents You Can View, which shows the reports you can open for viewing, such as report document (.rptdocument) files and spreadsheet (.xls) files.

- **Items You Can Run**, which shows the files that you can run to generate new reports, such as report design (.rptdesign) files and spreadsheet executable (.sox) files.

Figure 2-8 shows an example of a documents page.

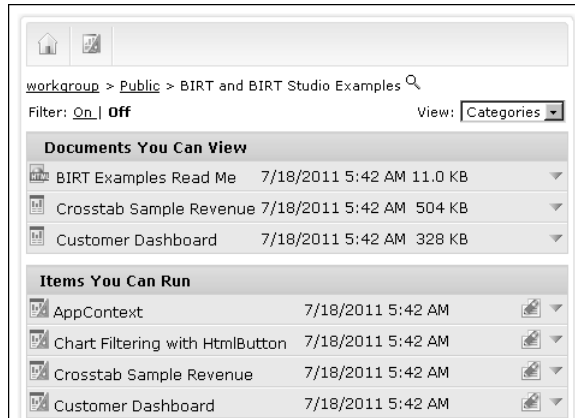


**Figure 2-8** A documents page

## Getting detailed information about files and folders

To see details about a file, follow these steps:

- 1 To view details about a file, choose File Menu.
- 2 Choose Details.

When you choose this icon, Actuate Deployment Kit displays a details page that includes information about the creator of the folder and the location of the folder in the file system. Figure 2-9 shows the details of a file.

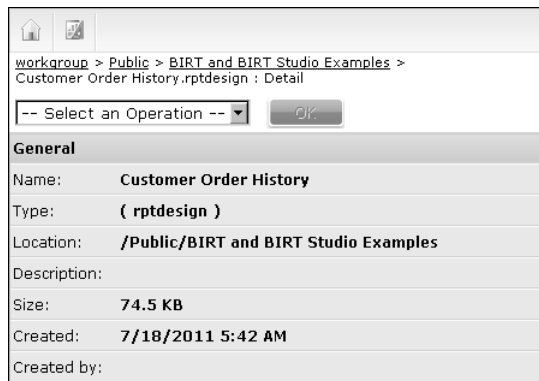

**Figure 2-9** Viewing file details

## About functionality levels

Functionality levels determine the Deployment Kit user interface features available to users. Functionality levels control the options to delete folders, share files, customize the interface and search the file system. If you are not able to use a feature, request a functionality-level change from an administrator.

## Working with files

Using the default display settings, files appear in the following categories:

- **Documents You Can View.** When you choose a file from Documents You Can View, Actuate Deployment Kit opens it for viewing. For information about operations you can perform while viewing a report, see *Working with Actuate BIRT Viewers*.

You use Microsoft Excel to view spreadsheet reports. If a spreadsheet executable requires parameters you select them before you can view the report document.

- **Items You Can Run.** When you choose a file from Items You Can Run, Actuate Deployment Kit displays a page for submitting a run request.
- The document pages that display folder contents show these files in separate sections. Depending on which files you can access, you see some, all, or none of these categories.

From the document pages, you can perform the following additional file operations:

- Get detailed information about a file.
- Delete files that you own.

Table 2-1 lists the available default set of file types.

**Table 2-1** Deployment Kit file types

<b>File type</b>	<b>Description</b>
htm or html	HTML document
rptdesign	Actuate BIRT Report Design
rptdocument	Actuate BIRT Report Document
rptlibrary	Actuate BIRT Report Design Library
rpttemplate	Actuate BIRT Report Design Template
soi	Actuate Spreadsheet
sod	Actuate Spreadsheet Design
sox	Actuate Spreadsheet Executable



**Table 2-1** Deployment Kit file types


File type	Description
xls	Microsoft Excel Spreadsheet
xlsx	Microsoft Excel Open XML Format Spreadsheet

## Deleting a file

You can delete a file from your home folder.

### How to delete a file

-  1 To delete a selected file, choose File Menu.
-  2 Choose Delete, as shown in Figure 2-10.

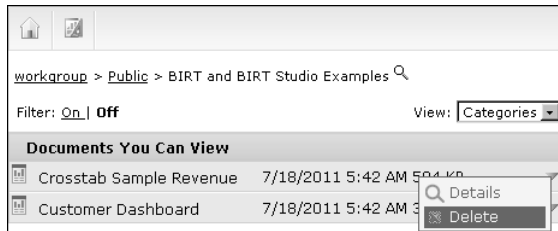

**Figure 2-10** Deleting a file

- 3 At the confirmation prompt, choose OK to confirm the deletion of the selected file.

---

## Using filters

You can filter the list of items that appear on a Documents page. Typically, you filter items on a page when:

- The lists of documents are too long to view conveniently. Files appear in alphabetical order and you cannot change the sort order.
- You need to view a list of items that match specified conditions. For example, you can use the filter to display only viewable reports, or only reports that begin with the letters Sales.
- The number of items exceeds 500. Actuate Deployment Kit displays a maximum of 500 items.

## Enabling the filter option

To filter, you must first enable the filter option. The filter options vary for each page, depending on which items appear. For example, on Documents, you can filter files and folders. When you enable the filter option, it is enabled until you disable it.

## Filtering items on a documents page

By default, Documents displays all the contents of the current folder, including subfolders and all versions of report documents and report object executable files. Using the filter option, you select what folder contents to display.

### How to filter items on a documents page

- 1 Choose Filter On. The available filter options appear on Documents, as shown in Figure 2-11.



**Figure 2-11** Choosing filter options

- 2 Select the items to display:
  - Folders. This item is selected by default. If it is not selected, folders do not appear.
  - Documents. This item is selected by default. If it is not selected, viewable documents do not appear.
  - Executables. This item is selected by default. If it is not selected, report object executable files do not appear.
- 3 To filter items by certain characters, type a string in the text field. You can use the asterisk (\*) wildcard character in the string. For example, to display all reports that start with the word detail, type:  
`detail*`

The string applies to all items that you selected for display in step 2. If you selected folders and documents, only folders and documents matching the string appear.
- 4 Choose Apply to run the filter. The resulting page displays the filtered items.

## Removing filter selections

The filter selections that you set on a page remain in effect until you reset the filter or log out of Actuate Deployment Kit. Choose Reset to revert to the default filter and display all items. Just as you can set filter selections on a page-by-page basis only, you reset filter selections on a page-by-page basis.

---

## Setting your locale

Your administrator can implement a page with fields to set the language and time zone for Deployment Kit. This interface provides log in capabilities as well. If you use login credentials, Actuate Deployment Kit provides a home folder for your personal reports. By default only you and the administrator can access your personal home folder. You own your home folder and have full privileges for it. You can choose My Folder to open your home folder.

### How to select a locale

Use this procedure if the locale interface is enabled for Deployment Kit.

- 1 To open the Actuate Deployment Kit login page, complete one of the following tasks:
  - Start your web browser, then provide the URL for the Actuate Deployment Kit login page supplied by your system administrator. This example uses the following URL:  
`http://actuate1:8080/ActuateJavaComponents/login.do`
  - If your company has a web site with a link to the Actuate Deployment Kit locale page, start your web browser, then choose the hyperlink.

Figure 2-12 shows the log in screen.



The screenshot shows a login form with the following fields and values:

- Volume profile:
- User name:
- Password:
- Language:
- Time zone:

At the bottom of the form is a **Log In** button.

**Figure 2-12** Choosing log in options

**2** Supply locale information and login credentials:

- Type the user name and password that the system administrator assigned to you.
- Select a language from the drop-down list. Your selection determines the language for the Actuate Deployment Kit user interface and the formatting of dates, times, currency, and numbers. The user interface appears in US English if a resource file for the language you select is not available.
- Select a time zone from the drop-down list. Your selection determines the time stamp for files.

**3** Choose Log In.



# 3

## Running jobs

This chapter contains the following topics:

- Running a job
- Using parameters

---

## Running a job

You run a report executable when you want Actuate Deployment Kit to generate a report with the most current data. A report executable file contains compiled code that specifies how the server generates a report and what data it retrieves for the report. A specific run of a report executable or opening of a document file is called a job. You run BIRT Report Design (.rptdesign) files and open BIRT Report Documents (.rptdocument) files using Actuate BIRT Deployment Kit. You run spreadsheet executable (.sox) files and open spreadsheet document (.soi) files using Actuate BIRT Spreadsheet Deployment Kit.

When you run a job, Deployment Kit provides some default settings. You change these settings to filter report data by report parameters.


### Running a BIRT report job

Running a job instructs the server to process a report executable or open a document immediately. When the job successfully finishes, the generated output appears. If the job takes a few minutes to finish, Actuate Deployment Kit displays the completed pages as they become available.

#### How to run a job

This procedure describes how to run a BIRT report design (.rptdesign) file.

- 1 In Items You Can Run, navigate to the folder that contains the .rptdesign file.
- 2 Choose the link to the report. You can choose either the file name or the version name. If the report executable uses parameters, Run—Parameters appears, as shown in Figure 3-1.

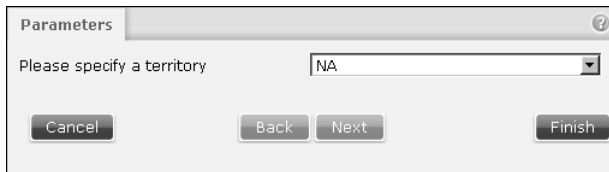

**Figure 3-1** Run—Parameters

- 3 Select values for the parameters if the report uses parameters. After filling the blanks, choose Finish. The file job will be run using your parameter values.

### Running a run and view spreadsheet report job

Selecting Run and View in BIRT Spreadsheet Deployment Kit instructs the server to process a spreadsheet executable (.sox) or document (.soi) immediately and display the result in the selected format. When the job successfully finishes, the generated report appears.

Use the run and view report job to perform the following actions:

- Generate the report immediately.
- View the report in a specific format.
- Create a temporary report that is not saved.

When you choose to run and view a report, Deployment Kit waits a fixed amount of time, 20 seconds by default, for the server to respond. If a job takes longer than the designated wait period to generate, Actuate Deployment Kit stops waiting for the report and displays a time-out message.

### How to run and view a spreadsheet report job

The following procedure assumes that you are using BIRT Spreadsheet Deployment Kit. This procedure describes how to run a spreadsheet object executable (.sox) file and view the resulting report document as a PDF file.

1 Navigate to the folder that contains the SOX file.



2 In Items You Can Run, choose the Run and View icon at the right of the report. The view format options appear in a context menu, as shown in Figure 3-2.



**Figure 3-2** Run and View—View format context menu

3 Select PDF. The Deployment Kit processes the job and displays the generated report.

---

## Using parameters

A parameter is an element in reports or dashboard gadgets that provides input to the select data used in a file job. Report developers use parameters to request report data from users for processing, formatting, and defining aspects such as:

- Which records are retrieved
- The sorting sequence of the data
- The output format

If an Actuate file has parameters, the user either sets the parameter values when running the file job, uses the default parameter values, if available, or can use a report parameter file that starts a report and loads the report parameters with predefined values.

## Understanding parameter types

The parameter types are:

- **Ad hoc**  
An ad hoc parameter uses patterns to retrieve or filter data from a document's data source. This data is then used by the document in its tables, charts, maps or other presentation formats built in to the document. Ad hoc parameters are supported for spreadsheet reports. They are not supported for BIRT reports.
- **Cascading**  
Parameter choices depend on other parameters. For example, a parameter to select from a list of cities is empty until the country is selected first.
- **Multiple-value**  
A multiple-value parameter accepts more than one value to filter the document data. For example, a report that provides sales information of products sold can request the user to select multiple products.
- **Optional**  
A user can select or group the data presented in a report by typing values or conditions into the optional parameter. If a user does not specify a value for an optional parameter, the document job uses a value chosen by the document designer.
- **Required**  
A required parameter must have a value before the document job can run. For example, a report that accesses a database can require user credentials or require that the user select a city before running a city report. Typically, a document designer supplies a default value for a required parameter.
- **Single-value**  
A single-value parameter accepts one value to filter the document data. For example, a report that provides sales information by customer requires the user to select a customer from a list of existing customers.

The example in Figure 3-3 shows Parameters prompting input of values for several parameter types.

The screenshot shows a 'Parameters' dialog box with the following fields and options:

- Product Line: No Condition (dropdown)
- Order Date: No Condition (dropdown)
- Credit Limit: No Condition (dropdown)
- ReleaseDate: 3/21/2011 (text field with calendar icon)  No value
- InternalOnly:  Yes  No \*
- Comments: none (text field)  No value
- City: No Condition (dropdown)
- Order Number: (text field)  No value

\*: Required.

Buttons: Cancel, Back, Next, Finish

**Figure 3-3** Parameters page

## Using multiple-value parameters

Multiple-value parameters are drop-down lists, radio buttons, or check lists. The values you select in a multiple-value parameter restrict the resulting document data to the elements with the selected values for that parameter. For example, if you select specific years from a multiple-value parameter for years, then only data from those selected years is generated for the report.

## Making expressions for ad hoc parameters

The value of an ad hoc parameter can be a single value or an expression. Expressions use special characters called operators to select a group or range of values. For example, a greater than sign (>) specifies matching a value that is greater than the value that follows the symbol, as in >10. In this example, the greater than sign is the operator and 10 is the value.

There are two types of ad hoc parameters available, Dynamic Filters and Query by Example (QBE). Dynamic Filters requests users to build simple expressions using a single operator. Query by Example (QBE) syntax requests users to select one or more operators to build simple and complex expressions.

Examples of using expressions in an ad hoc parameter:

- A single value, such as 10.
- A relational expression, such as >10.
- A range of values, such as 10–20.2.
- A list of values, expressions, or ranges, separated by pipe signs, such as 10 | 20–30 | >50. Some locales also accept a comma as a list separator.

- A group of values, such as (abc | xyz), that a Boolean expression can combine, such as (abc | xyz)&bbb.

Dynamic filters are used in BIRT design and document files. QBE ad hoc parameters are used in BIRT spreadsheet files.

## Using a dynamic filter operator

When an Actuate file prompts the user to select from a list of operators, the user selects one of the operators and supplies a value for the operator to use. This expression is used to select data to display in the document.

Figure 3-4 shows an example of using dynamic filter operators.

**Figure 3-4** Using dynamic filters

Dynamic filters are available in BIRT design and document files. Table 3-1 lists the operators that are available in Actuate files. Developers select which operators are presented to users of the file.

**Table 3-1** Dynamic filter operators

Operator	Usage
Between	Find data that is between two specific values
Equal to	Find data equal to a specific value
Greater than	Find data greater than the specific value
Greater than or equal to	Find data greater than or equal to the specific value
In	Find data that matches any of the selected values
Is false	Find data that equals zero
Is not null	Find data that does not have a null value
Is null	Find data that has a null value
Is true	Find data that does not equal zero
Less than	Find data less than the specific value

**Table 3-1** Dynamic filter operators

Operator	Usage
Less than or equal	Find data less than or equal to the specific value
Like	Find data matching the value's string pattern
Match	Find data matching the value's string expression
No Condition	Find all values for this parameter
Not between	Find data that is not between two specific values
Not equal to	Find data not equal to a specific value
Not in	Find data that does not match any of the selected values
Not like	Find data not matching the value's string pattern
Not match	Find data not matching the value's string expression

The Like operator supports the following special characters:

- % matches zero or more characters. For example, %ace% matches any value that contains the string ace, such as Ace Corporation, Facebook, Kennedy Space Center, and MySpace.
- \_ matches exactly one character. For example, t\_n matches tan, ten, tin, and ton. It does not match teen or tn.

The Match operator is case sensitive and supports special metacharacters that can be combined to form text patterns called regular expressions. Metacharacters can be combined to form complex matches. For example, using ^H.\*(Gifts | Collectables)\$ to search through a list of company names matches all companies whose name starts with the letter H, has one or more letters after H and includes the word Gifts or Collectables at the end of the name.

If you need to match on a metacharacter itself, a backslash (\) followed by the metacharacter causes the search to interpret the metacharacter as a normal character. For example, if \$ is part of the data to be found, it must be entered as \\$ because \$ is a metacharacter.

Table 3-2 lists the metacharacters that can be used to form regular expressions with the Match operator.

**Table 3-2** Regular expression metacharacters

Metacharacter	Usage
.	Matches any single character.
*	Matches the previous character zero or more times. For example po* matches Liverpool and Leipzig.
!	Matches everything not equal to the search expression.

*(continues)*

**Table 3-2** Regular expression metacharacters (continued)

Metacharacter	Usage
()	Matches all characters in the set between the parentheses.
	Matches if any one of multiple conditions is true.
[]	Matches any character in the set between the brackets.
[^ ]	Matches any character not in the set between the brackets.
+	Matches the previous character one or more times. For example, po+ matches Singapore and Liverpool but not Leipzig.
?	Matches the previous character zero or one times. For example, po? matches Singapore and Leipzig.
x{y}	Matches the previous character exactly y times. For example, o{2} matches Liverpool but not Lyon.
^	Matches the start of the string. For example ^A matches Australia but does not match Los Angeles.
\$	Matches the end of the string. For example n\$ matches Lyon.
\	Used with a metacharacter to make it a literal character. For example, to search for a string containing the \$ sign, search for \\$.
\A	Matches the start of a string.
\b	Matches the edge of a word, beginning or end.
\B	Matches any place inside a word, but not the edge of a word.
\d	Matches any decimal digit.
\D	Matches any non digit character.
\s	Matches a space.
\S	Matches a non space.
\w	Matches a word that is made of letters, numbers or an underscore.
\W	Matches a non word.
\Z	Matches the end of a string.

Table 3-3 provides examples of dynamic filter expressions.

**Table 3-3** Example results for dynamic filter expressions

Operator	Values	Matches	Does not match
Between	'A'	'Barcelona'	'Zurich'
	'D'	'Dublin'	'Seattle'



**Table 3-3** Example results for dynamic filter expressions

Operator	Values	Matches	Does not match
Greater than	'Oslo'	'Oulu' 'Paris'	'Oslo' 'NYC'
In	'Lyon' 'New York'	'Lyon' 'New York'	'London' 'New Haven'
Is False		'0'	'11'
Like	'A%'	'Amsterdam' 'Auckland'	'Zurich'
Like	'B__'	'Bern'	'Berlin' 'Boston'
Like	'Be%n'	'Berlin' 'Bern'	'Bergamo'
Like	'%& Co%n'	'Handji Gifts& Co' 'Models & Co.'	'Boards & Toys Co' 'Cruz & Sons Co.'
Match	'ity'	'City' 'Makati City'	'Nantes' 'Paris'
Match	'ern'	'Stavern' 'Bern'	'Liverpool' 'Bergen'
Match	'(ern) (New)'	'Bern' 'Newark' 'New Bedford'	'Glendale' 'Cunewalde'
Match	'A'	'Allentown' 'Los Angeles'	'Nantes' 'Paris'
Match	'.A'	'Los Angeles'	'Allentown'
Match	'[A-C]'	'Burbank' 'Los Angeles' 'NYC'	'Frankfurt' 'Singapore'
Match	'es.'	'Manchester'	'Nantes'
Match	L[^o]s	'Lisboa'	'Los Angeles'

### Using Query by Example operators

Users build a QBE expression by combining operators and values, for example >10 is a QBE expression defining a value greater than ten. QBE expressions are available with BIRT Spreadsheet and e.Report files. Table 3-4 lists the operators that can be used to form ad hoc parameter expressions.

**Table 3-4** QBE operators used in ad hoc parameters


Name	Operator	Usage
Ampersand	&	Match if two or more conditions are true
Backslash	\	Used with an operator to make it a literal character
Brackets	[]	Matches any character in the set between the brackets
Caret	^	Matches everything not in the bracket set
Comma	,	Combines search terms and expressions
Exclamation	!	Matches everything not equal to the search expression
Greater than	>	Matches everything greater than the value that follows the operator
Greater than or equal to	>=	Matches everything greater than the value that follows the operator
Hyphen	-	Separates upper and lower limits of the search range
Less than	<	Matches everything less than the value that follows the operator
Less than or equal to	<=	Matches everything less than or equal to the value that follows the operator
Number sign	#	Matches any single ASCII numeric character [0-9]
Parenthesis	()	Matches all characters in the set between the parenthesis
Percent sign	%	Matches any character, group of characters, or no character
Pipe sign		Matches if any one of multiple conditions is true
Single quotation mark	'	Converts an operator character in a string into a literal character
Underscore	_	Matches any single character

**How to use the ad hoc parameter builder**

For a field that supports typing an ad hoc value, you can type the value and use the ad hoc parameter builder operators and characters to provide a QBE expression in the field.



**1** In Parameters, choose expression builder, as shown in Figure 3-5.

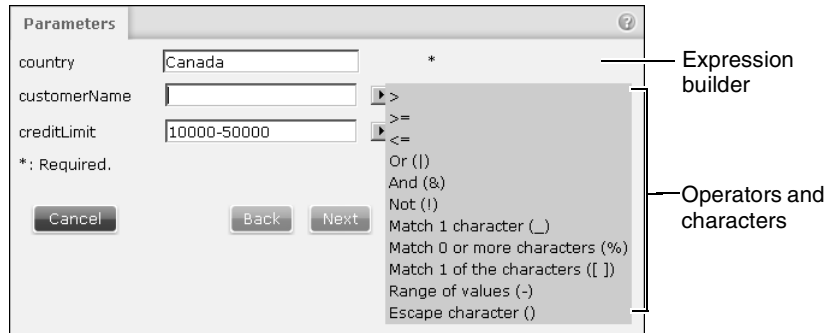

**Figure 3-5** Using the ad hoc expression builder

- 2 Use a combination of text, operators, and characters to build a QBE expression for any of the parameter fields.

Figure 3-6 shows the result of adding two pipe signs (|) and typing several values. The resulting QBE expression specifies that the values must match 'A', 'B', or 'S'.



**Figure 3-6** A QBE expression on the requester page

- 3 Choose Next to provide Save As information or choose Finish to save the report job.

Table 3-5 provides examples of QBE expressions.

**Table 3-5** Example results for QBE expressions

QBE expression	Matches	Does not match
Sm[aeiou]th	'Smith' 'Smath'	'Smooth' 'Smth'
ab[%]c	'ab%c'	'abac' 'ab[%]c'
Smith%	'Smith' 'Smithsonian' 'Smith '	'Smit'
ab%c	'abac' 'ab%c' 'abc'	
Sm_th	'Smith' 'Smoth'	'Smooth' 'Smth'

## Using data types with Query by Example

A value in a QBE expression must match the data type of the data source field to which it applies. For example, you must use a numeric value in a QBE expression that filters a numeric field. Do not include characters, such as commas used as placeholders, when typing a numeric parameter value.

### Using a null value in a QBE expression

To specify that a field in the database must or must not contain a data value, use the keyword Null. To specify that the field must not contain a data value, type Null as the QBE expression. To specify that a field must contain a data value, type !Null as the QBE expression. Null is not case sensitive.

### Using a date in a QBE expression

To supply a date in the short date format, use the locale-specific date separator and date format order. Table 3-6 lists examples of correct date formats in different locale settings.

**Table 3-6** Using a date in a QBE expression

Locale setting	Correct format
US English	07/15/2011
French (France)	15/07/2011
Russian	15.07.2011

When you use a date in a QBE expression, use four-digit years rather than two-digit year abbreviations. For example, to signify July 15, 2011, type 07/15/2011 rather than 07/15/11.

### Matching an exact string value in a QBE expression

To ensure that only exact values are found in data sources, enclose the text string in single quotation marks in the QBE expression. Returned data must match the enclosed string exactly. Returned data does not include values that have additional characters at the end of the string. A comma appears as a list separator for Smith, Jan. To specify a locale-independent list separator, use the pipe sign (|).

Table 3-7 lists the values that example QBE expressions return.

**Table 3-7** Matching an exact string value in a QBE expression

QBE expression	Matches	Does not match
Smith	'Smith' or 'Smith ' or 'Smithson'	
'Smith'	'Smith'	'Smith ' 'Smithson'

**Table 3-7** Matching an exact string value in a QBE expression

QBE expression	Matches	Does not match
Smith, Jan	'Smith, Jan' or 'Smith, John' or 'Janesson, Per'	
'Smith, Jan'	'Smith, Jan'	'Smith, John'
Red   Green   Blue	'Green' 'Red   Green   Blue'	
'Red   Green   Blue'	'Red   Green   Blue'	'Red' 'Green' 'Blue'

### Making a literal character in a QBE expression

A specific syntax is required when a QBE expression attempts to match a value using an operator character as a literal character. Operator characters are shown in Table 3-4. Type a backslash (\) before each special character, or enclose the string in single quotation marks, which directs the application to match the string value exactly. For example, typing a backslash before the comma directs the application to interpret the comma literally in the following QBE expression:

```
16M x 1 Dynamic Ram\, 3.3 volts
```

Without the backslash, depending on your locale setting, Deployment Kit interprets the comma as an OR.

To specify a list separator that is locale independent, use the pipe sign (|).

The following QBE expression matches the percent sign (%) literally in a string:

```
'ab\%c'
```

### Using a special character to match one or more characters in a QBE string

Table 3-8 lists characters that have special meanings in a string in a QBE expression.

**Table 3-8** Characters that have special meanings in a string in a QBE expression

Character	Meaning in QBE
Brackets, [ ]	Match any one of the characters within brackets. Not supported by all data sources.
Percent, %	Match any character, group of characters, or no character.
Underscore, _	Match any single character.

Table 3-9 provides examples of QBE expressions that use the preceding special and literal characters.

**Table 3-9** Examples of characters that have special meanings in a string in a QBE expression

QBE expression	Matches	Does not match
Sm[aeiou]th	'Smith'	'Smooth'
	'Smath'	'Smth'
Sm\[aeiou\]th	'Sm[aeiou]th'	'Smith'
ab[%]c	'ab%c'	'abac'
		'ab[%]c'
Smith%	'Smith'	'Smit'
	'Smithsonian'	
	'Smith '	
ab%c	'abac'	
	'ab%c'	
	'abc'	
Sm_th	'Smith'	'Smooth'
	'Smth'	'Smth'

### Matching character sets and spaces with the percent sign

The percent sign (%) matches any set of characters or blank characters. Deployment Kit adds a percent sign to a string supplied as a QBE expression when all the following conditions are true:

- The database column is of type string.
- The input parameter value is not enclosed in single quotation marks and is not a range.
- The string does not contain a percent sign, such as Sm%th.

Deployment Kit adds a percent sign to ensure blank characters at the end of strings in the database do not interfere with the matching process. If you do not want Deployment Kit to add the percent sign (%) to the end of a string, enclose the string in single quotation marks in the QBE expression.

Table 3-10 shows the results of the application adding a percent sign to QBE expressions.

**Table 3-10** Adding a percent sign to QBE expressions

QBE expression	SQL condition	Matches	Does not match
'Smith'	custName LIKE 'Smith'	'Smith'	'Smith '
Smith	custName LIKE 'Smith%'	'Smith' 'Smith ' 'Smithe' 'Smithsonian'	

To match values ending in a space character when the QBE expression contains a percent character, append a percent character to the QBE expression. For example:

```
Sm%th%
```

The above syntax is valid for a QBE expression with only a single value. Deployment Kit does not add a percent sign to an expression for a range of values. For example, if the database column custName is a string and the report user types D as the value of the ad hoc parameter, the query retrieves the data row that contains Design Boards.

If the user types a range of values, such as A-D, for the ad hoc parameter value, Deployment Kit does not match customer records where custName is Design Boards. This is because the value is a range and not a single value. For example, QBE expression values that retrieve values starting with A through D appear in Table 3-11, including one to which Deployment Kit adds a percent sign.

**Table 3-11** Examples of QBE expressions to retrieve a range of values

QBE expression	SQL condition
A-E	custName BETWEEN 'A' AND 'E'
>A<&<E	custName > 'A' AND custName < 'E'
A B C D	custName LIKE 'A%' OR custName LIKE 'B%' OR custName LIKE 'C%' OR custName LIKE 'D%'

### Matching character sets with brackets

Brackets ([ and ]) specify a set of matching characters. Deployment Kit manages any special characters enclosed by brackets as literal characters. For example, the following QBE expression encloses the percent sign (%) and uses it literally:

```
ab[%]c
```





# Index

## Symbols

- ^ operator 28
- \_ (underscore) character 31
- , (comma) operator 28
- ! operator 28
- ' (single quotation mark) character 30, 31, 32
- ' (single quotation mark) operator 28
- () operator 28
- [] (square brackets) characters 31
- [] operator 28, 33
- \ (backslash) character 25, 31
- \ (backslash) operator 28
- & operator 28
- # operator 28
- % (percent sign) character 31, 32
- % (percent sign) operator 25, 28
- < operator 28
- <= operator 28
- > operator 28
- >= operator 28
- | (pipe sign) character 30
- | (pipe sign) operator 28
- (hyphen) operator 28
- \_ (underscore) operator 25, 28

## A

- accessing
  - Actuate Deployment Kits 3
  - Actuate documentation 6
  - folders 12
  - home folders 17
  - reports 8, 12
- Actuate Deployment Kit License 8
- Actuate Deployment Kits
  - filtering items for 15–17
  - localizing 17
  - logging in to 17
  - navigating through 9, 12, 13, 15
  - overview 3, 10
  - personalizing features 14
- Actuate Java Components 2, 8
- Actuate products 6

- ad hoc parameter builder 28
- ad hoc parameter types 23
- ad hoc parameters 22, 23, 28, 33
- applications 4

## B

- backslash (\) character 25, 31
- banner (Actuate Development Kit) 10
- Between operator 24
- BIRT Deployment Kit 9, 20
  - See* Actuate Deployment Kits
- BIRT Interactive Viewer 2, 9
- BIRT Report Studio 9
- BIRT reports 20, 22
  - See also* reports
- BIRT Spreadsheet Deployment Kit 20
  - See also* Actuate Deployment Kits
- BIRT Studio 4
- BIRT Viewer 2, 5
- blank characters 32
- Boolean expressions 24
- browser-based tools 5
  - See also* web browsers
- buttons 23

## C

- Categories view 11, 12
- changing
  - default settings 20
  - functionality levels 14
  - sort order 15
- character filters 16
- character patterns 25, 28, 32, 33
- character strings. *See* strings
- characters
  - as literal values 25, 28, 31, 33
  - matching string values and 30, 31, 32
  - QBE expressions and 25, 30
- check boxes 23
- comma-separated values 23
- creating
  - QBE expressions 27, 29, 30

- creating (*continued*)
  - reports 3
- customizing Deployment Kit features 14

## D

- dashboards 21
- data
  - filtering 22, 23, 24, 30
  - formatting 18, 30
  - grouping 22
  - retrieving 20, 21, 22, 23
- Data Analyzer 4
- data filters 24
- data sources
  - filtering data in 22, 23, 24, 30
  - retrieving data from 21, 22, 23
  - retrieving exact values in 30, 31
- data types 30
- date separators 30
- dates 30
- default settings 20
- default values 21, 22
- deleting
  - filter selections 17
  - report files 15
- deployment kits. *See* Actuate Deployment Kits
- designs 3, 13, 20
- details icon 13, 15
- Details view 11
- displaying
  - folders 10
  - licensing information 10
  - report files 10, 12, 14, 15, 17
  - reports 3, 12, 20
  - spreadsheet reports 14, 20, 21
  - subfolders 12, 16
- documentation iii, 4–6, 9
- documentation updates 4
- documents 12, 16, 20
  - See also* reports
- Documents link 12
- Documents page 9, 12, 14, 16
- Documents You Can View category 12, 14
- downloading
  - documentation 6

- drop-down lists 23
- dynamic filter operators 24
- dynamic filter parameters 23, 24
- dynamic filters 24

## E

- e.reports 27
  - See also* reports
- Equal to operator 24
- exact string values 30, 31
- executable files 2, 13, 16, 20
- expression builder 28
- expressions 23, 24, 25
  - See also* QBE expressions

## F

- features 14
- file links 20
- file lists 15
- file systems 3
- file types 14
- file views 10
- files
  - See also* specific type
  - accessing 12
  - changing layouts 10
  - deleting 15
  - displaying 10, 12, 14, 15, 17
  - filtering 16
  - managing 3
  - selecting 20
- files and folders page 3
  - See also* Documents page
- filter expressions 23, 24, 25
- Filter options 10, 16
- filtering
  - data 22, 23, 24, 30
  - items on Deployment Kit pages 15–17
- filters 17, 24
- filters selections 17
- folder links 12
- folders
  - accessing 12, 17
  - changing layouts 10
  - displaying 10, 12, 16
  - filtering contents 16

- removing files from 15
- viewing contents 10, 12, 15, 17
- viewing details about 13, 15

Folders links 12

formatting data 18, 30

functionality levels 14

## G

generating reports 13, 20

glossary of terms 5

graphical user interfaces 14, 18

Greater than operator 24

Greater than or equal to operator 24

grouping data 22

GUIs. *See* graphical user interfaces

## H

help 5

Help link 10

home folders 12, 17

HTML documentation 6

## I

Icons view 11

immediate jobs 20, 21

In operator 24

Information Console 3

- changing layout of 10

input 21

installation 6

Interactive Viewer 2, 5, 9

Is false operator 24

Is not null operator 24

Is null operator 24

Is true operator 24

iServer System 6

Items You Can Run category 13, 14

## J

Java Components. *See* Actuate Java Components

jobs 20–21, 29

## L

landing pages 2, 9

language settings 17, 18

Less than operator 24

Less than or equal operator 25

licenses 8

licensing information 10

Like operator 25

links 9, 12, 17, 20

list separators 23, 30

List view 12

lists 15, 23, 30

literal values 25, 28, 31, 33

locales 17, 18, 30

login credentials 17, 18

login page 17

## M

Manuals directory 6

Match operator 25

menus 10

metacharacters 25

multiple-value parameters 22, 23

My Folder link 17

## N

networked environments 2

No Condition operator 25

Not between operator 25

Not equal to operator 25

Not in operator 25

Not like operator 25

Not match operator 25

Null keyword 30

null values 30

numbers 30

## O

online documentation 4–6

online documentation. *See* documentation

online help 5

opening

- Actuate Deployment Kits 9, 17
- document files 20
- Java Components application 8
- spreadsheet reports 20

operators

- as literal characters 31

operators (*continued*)  
  filter expressions 23, 24  
  QBE expressions 27  
optional parameters 22  
output 20

## P

parameter types 22, 23  
parameters  
  assigning values to 23, 30, 33  
  filtering data with 22, 23, 24, 30  
  retrieving data with 21, 23, 28  
  running jobs and 20  
  setting values for 21, 22  
  viewing spreadsheet reports and 14  
Parameters page 20, 22  
passwords 18, 22  
pattern matching 25, 28, 32, 33  
PDF documentation 6  
PDF files 21  
percent sign (%) character 31, 32  
pipe sign (|) character 30  
pipe-separated values 23  
predefined values 21, 22  
printing  
  Actuate documentation 6  
privileges 17  
products 6  
public folders 12

## Q

QBE expressions  
  creating 27, 29, 30  
  defining ad hoc parameters for 23, 28  
  entering literal characters in 31, 33  
  formatting date values and 30  
  matching string values and 30, 31, 32  
  retrieving blank characters and 32  
  retrieving null values and 30  
queries. *See* QBE expressions  
query operators 27

## R

radio buttons 23  
range of values 23, 33  
regular expressions 25

report designs 3, 13, 20  
report documents 12, 16, 20  
report executables. *See* report object  
  executable files; spreadsheet object  
  executable files  
report file types 14  
report files  
  *See also* specific type  
  accessing 12  
  changing layouts 10  
  deleting 15  
  displaying 10, 12, 14, 15, 17  
  filtering 16  
  managing 3  
  selecting 20  
report object executable files 16  
  *See also* executable files  
report parameter values files 21  
report parameters. *See* parameters  
report viewers 2  
  *See also* specific viewer  
reports  
  accessing 8, 12  
  creating 3  
  displaying 3, 12, 20  
  generating 13, 20  
  retrieving data for 20, 21, 22, 23  
  running 14, 20, 21  
repository 3  
requests. *See* jobs  
required parameters 22  
.rox files. *See* report object executable files  
.rptdesign files. *See* report designs  
.rptdocument files. *See* report documents  
Run and View icon 21  
Run page 20  
run requests. *See* jobs  
running  
  jobs 20–21  
  reports 14, 20, 21

## S

saving jobs 29  
searching  
  data sources 24, 28  
side menu 10

- single quotation mark (') character 30, 31, 32
- single-value parameters 22
- software 6
- .soi files. *See* spreadsheet object document files
- sort order 15
- .sox files. *See* spreadsheet object executable files
- space characters 33
- Spreadsheet Deployment Kit. *See* BIRT Spreadsheet Deployment Kit
- spreadsheet designs 3
- spreadsheet object document files 20
- spreadsheet object executable files 13, 20
  - See also* executable files
- spreadsheet reports 12, 14, 20, 21, 27
- square brackets ([ ]) characters 31
- strings
  - matching blank characters in 32
  - matching exact characters in 30, 31
  - matching set of characters in 25, 28, 31, 32, 33
- subfolders 12, 16
- submitting jobs 20

## T

- text patterns 25
- time stamps 18
- time zones 17, 18
- time-out messages 21
- tools 5
- types. *See* data types

## U

- underscore (\_) character 31
- unscheduled jobs 20, 21
- updates (documentation) 4

- URLs 8, 17
- user interfaces 14, 18
- user names 18, 22
- user selection lists 23, 30

## V

- values
  - See also* data
  - assigning to parameters 21, 22, 23, 30, 33
  - retrieving exact 30, 31
  - retrieving null 30
  - retrieving specific 23, 24, 27
  - selecting range of 23
- version information 10
- viewers 2
  - See also* specific viewer
- viewing
  - folders 10
  - licensing information 10
  - report files 10, 12, 14, 15, 17
  - reports 3, 12, 20
  - spreadsheet reports 14, 20, 21
  - subfolders 12, 16
- views 10

## W

- wait periods 21
- web sites 17
- white space characters 33
- wildcard characters 16

## X

- .xls files. *See* spreadsheet reports

## Y

- year values 30

